

THE GATEWAY SOLUTION FOR YOUR BUSINESS



KNX + LON

Increase productivity and reduce costs

The MBS universal gateways are based on the same product platform and therefore offer an extraordinary degree of versatility and flexibility: new gateway purchases are rendered unnecessary because the devices' adaptability means new functionalities can simply be activated. The integrated KNX + LON-adapters make the usual external bus couplers unnecessary, reducing the amount of wiring required and enabling faster connection to serial or network-based communication protocols.

Based on our modularity, we develop and manufacture cost-effective and time-efficient solutions for you which are highly innovative and guarantee a secure investment. Take advantage of the expertise we have accumulated over more than 30 years and our experience of customer projects in various industries.

LAN

RJ45: 10/100 MBit Ethernet
Link: indicates a LAN connection
10/100: Indicates the connection speed

PWR - Power

Power supply
V+: +12 to +24V DC or 12 to 24V AC
V-: GND or 12 to 24V AC

LED

Power: Illuminated as soon as the device is connected to a suitable operating power supply
ST: Multicolor status LED
RX: Flashes when the device is receiving data
TX: Flashes when the device is sending data

Reset

Reset button

Version RS232

COM1
RS232
TXD: Sending line
RXD: Receiving line
SGND: Ground connection
Shld: Shielding

DIP-Switch

1: Not used
2: Not used
3: Not used

Version RS485 (Isolated 1kV)

COM1
RS485
B+: Non-inverted input
A-: Inverted input
SGND: Ground connection
Shld: shielding

DIP-Switch

Bias: voltage
Bias: voltage
120 Ohm: Termination resistance

LON (TP/FT-10)

LON 1
LON 2
Shield
Shield

Taster

LON-Service

LED

LON-Status

KNX


+: KNX Connection
+: KNX Connection
-: KNX Connection
-: KNX Connection

LED

KNX RX
KNX TX
KNX Power

Power consumption KNX Bus

Maximum 7mA
(The average current consumption is about 4mA)

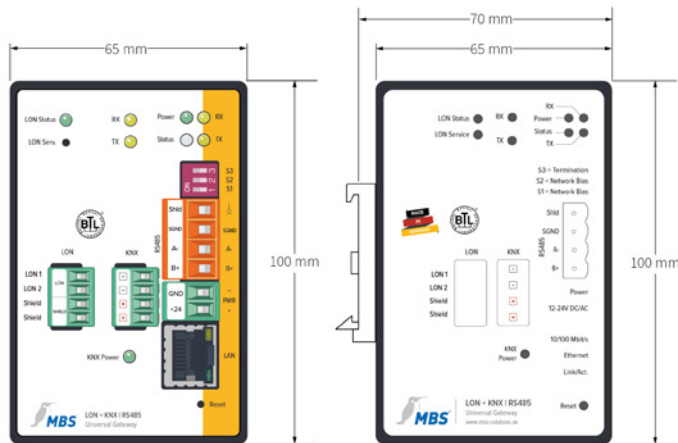

Power supply for EIB connectivity:
For EIB connections, please ensure that a KNX power supply is provided by the customer.



Please ensure that your gateway is configured before it is put into operation.

Need help with configuration?
Contact us!

+49 21 51 72 94-0
vertrieb@mbs-solutions.de

Specifications

Power consumption: 2,4 watts
Weight: 400 grams
Dimensions: height: 100 mm, width: 65 mm, depth: 70 mm (incl. DIN top-hat rail adapter)
Ambient temperature: 0...45°C, 32...113°F
Ambient humidity: 20...80 per cent relative humidity, non-condensing
Protection class: IP20
Assembly: DIN top-hat rail TS35 in accordance with EN 60715

Article numbers

KNX + LON with 25 DP: RS-485: Art.-Nr. 11-0065 **RS-232:** Art.-Nr. 11-0080
You need more than 25 data points?
up to 200 DP: Art.-Nr. 13-0002 **up to 500 DP:** Art.-Nr. 13-0003
up to 1.000 DP: Art.-Nr. 13-0004 **up to 2.500 DP:** Art.-Nr. 13-0005

Please remember to include the required communication protocols in your order.

Imprint: **Managing Director:** Gerhard Memmen-Krüger, Nils-Gunnar Fritz
Register court: Krefeld HRB 33 7, USt.-IdNr.: DE 120 148 529, Headquarters: Krefeld
Responsible for contents according to § 6 MDSV: Gerhard Memmen-Krüger, Nils-Gunnar Fritz

*This product is CE certified
*Specifications subject to change