


# THE GATEWAY SOLUTION FOR YOUR BUSINESS

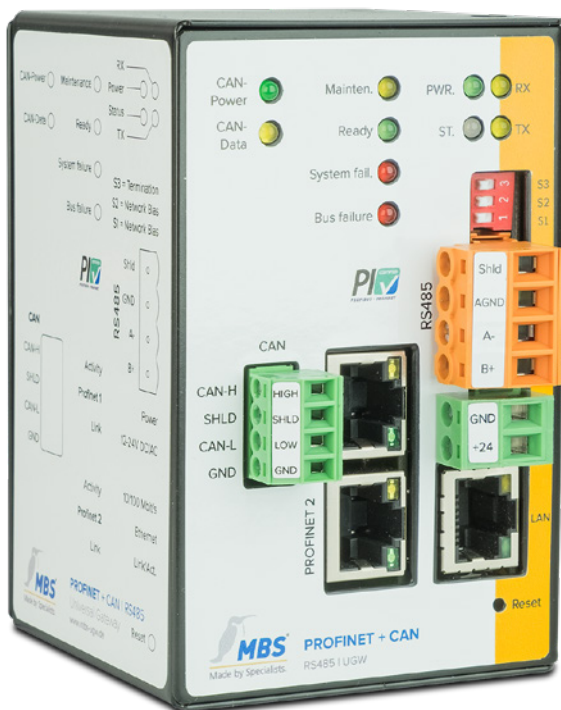

## PROFINET + CAN

Increase productivity and reduce costs

The MBS universal gateways are based on the same product platform and therefore offer an extraordinary degree of versatility and flexibility: new gateway purchases are rendered unnecessary because the devices' adaptability means new functionalities can simply be activated. The integrated PROFINET + CAN adapter make the usual external bus couplers unnecessary, reducing the amount of wiring required and enabling faster connection to serial or network-based communication protocols.

Based on our modularity, we develop and manufacture cost-effective and time-efficient solutions for you which are highly innovative and guarantee a secure investment. Take advantage of the expertise we have accumulated over more than 30 years and our experience of customer projects in various industries.

## LAN

RJ45: 10/100 MBit Ethernet  
Link: indicates a LAN connection  
10/100: Indicates the connection speed

## PWR - Power

Power supply  
V+: +12 to +24V DC or 12 to 24V AC  
V-: GND or 12 to 24V AC

## LED

Power: Illuminated as soon as the device is connected to a suitable operating power supply  
ST: Multicolor status LED  
RX: Flashes when the device is receiving data  
TX: Flashes when the device is sending data

## Reset

Reset button

## Version RS232

COM1  
RS232  
TXD: Sending line  
RXD: Receiving line  
SGND: Ground connection  
Shld: Shielding

## DIP-Switch

1: Not used  
2: Not used  
3: Not used

## Version RS485 (Isolated 1kV)

COM1  
RS485  
B+: Non-inverted input  
A-: Inverted input  
SGND: Ground connection  
Shld: shielding

## DIP-Switch

Bias: voltage  
Bias: voltage  
120 Ohm: Termination resistance

## PROFINET 1

Profinet Version 2.3 RT | Activity | Link

## PROFINET 2

Profinet Version 2.3 RT | Activity | Link

## LED


Profinet maintenance, configuration  
Profinet Ready  
Profinet System error  
Profinet Bus error

## CAN

CAN-H  
SHLD  
CAN-L  
GND

## LED

CAN-Power  
CAN-Data

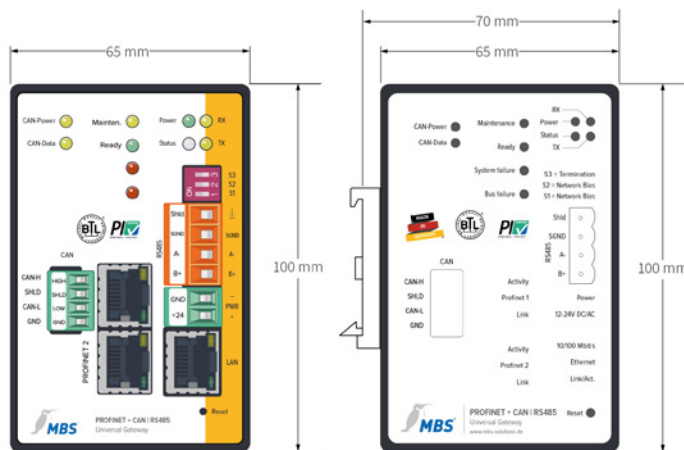

Please ensure that your gateway is configured before it is put into operation.

Need help with configuration?  
Contact us!

+49 21 51 72 94-0  
vertrieb@mbs-solutions.de

## Specifications

**Power consumption:** 3,4 watts  
**Weight:** 400 grams  
**Dimensions:** height: 100 mm, width: 65 mm, depth: 70 mm (incl. DIN top-hat rail adapter)  
**Ambient temperature:** 0...45°C, 32...113°F  
**Ambient humidity:** 20...80 per cent relative humidity, non-condensing  
**Protection class:** IP20  
**Assembly:** DIN top-hat rail TS35 in accordance with EN 60715

Imprint: **Managing Director:** Gerhard Memmen-Krüger, Nils-Gunnar Fritz  
**Register court:** Krefeld HRB 33 7, Ust.-IdNr.: DE 120 148 529, Headquarters: Krefeld  
**Responsible for contents according to § 6 MDSV:** Gerhard Memmen-Krüger, Nils-Gunnar Fritz

## Article numbers

**PROFINET+CAN with 25 DP: RS-485:** Art.-Nr. 11-0060 **RS-232:** Art.-Nr. 11-0081

**You need more than 25 data points?**

**up to 200 DP:** Art.-Nr. 13-0002

**up to 1.000 DP:** Art.-Nr. 13-0004

**up to 500 DP:** Art.-Nr. 13-0003

**up to 2.500 DP:** Art.-Nr. 13-0005

Please remember to include the required communication protocols in your order.

\*This product is CE certified  
\*Specifications subject to change



MBS GmbH  
Römerstraße 15 | 47809 Krefeld  
Tel. +49 21 51 72 94-0 | info@mbs-solutions.de

